

AC

MIXED threaded valves G1/8 - G 1/4 - G1/2

- Mixed commutation system (spool - poppet)
- High flow rate
- Quick response time
- High cycles
- Control: manual, mechanical, pneumatic, electric
- Modular sub-bases



TECHNICAL CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C		
Fluid temperature	max +50 °C		
Fluid	filtered air 50 µm, lubricated or not		
Commutation system	poppet mixed system		
Ways/Positions	5/2		
Pressure	10 bar max		
Control	pneumatic, electric, mechanical		
Return	pneumomechanical spring, pneumatic, electric		
Connections	G1/8	G1/4	G1/2
Nominal Ø (mm)	6	8	15
Nominal flow rate (NI/min)	1080	1600	4600

CONSTRUCTIVE CHARACTERISTICS


Valve body	G1/8 - G1/4 = zamak	
	G1/2 = die-cast aluminium	
Seals	nitrile rubber, polyurethane	
Actuators	technopolymer	
Spool	aluminium	

ELECTRIC CHARACTERISTICS


	G1/8	G1/4	G1/2
Electropilot	U1		U2
Coil	DA		DB
Power consumption	3,5 W (DC) - 5 VA (AC)		11 W (DC) - 10 VA (AC)
Connector	AM-5110		AM-5111
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC		
Manual override	with 2 position screw		

Flow rate characteristics


>> G1/8

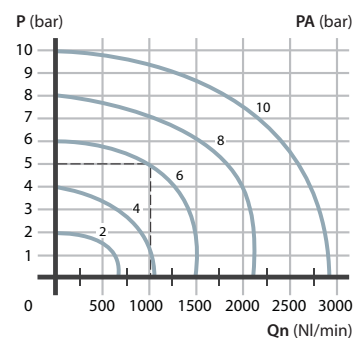

>> G1/4

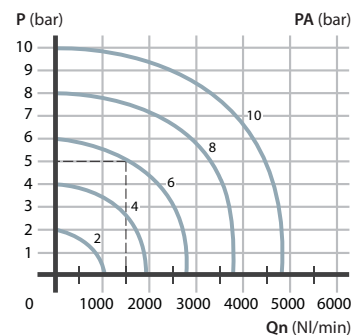

>> G1/2

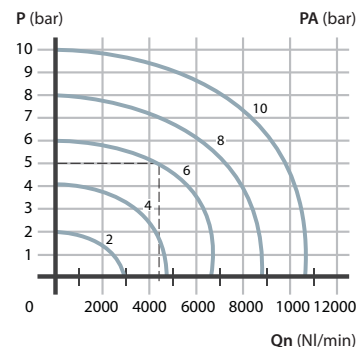


P = Working pressure
PA = Supply pressure
Qn = Flow rate

Indirect mechanical control for use with
pneumatic, mechanical and manual actuators




1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust

14 = Control
12 = Return

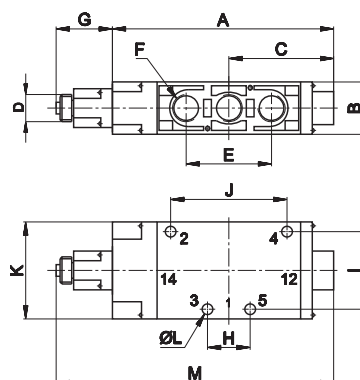

	G1/8	G1/4	G1/2
A	99	114	163
B	25	27	40
C	47	54	83
D	M14x1	M14x1	M14x1
E	36	44	80
F	G1/8	G1/4	G1/2
G	27	27	27
H	18	22	40
I	26	40	50
J	36	60	108
K	40	50	63
L	4,5	5,5	6,5
M	126	141	190

Symbol	Connection	Control	Return	Pressure bar	Weight Kg	Part no.
	G1/8	ball pushrod	pneumomechanical spring	1,8÷10	0,27	AC-7010
	G1/4			2,3÷10	0,28	AC-8010
	G1/2			2÷10	0,33	AC-9010

5/2

MANUAL ACTUATORS


	Recessed button	■ BLACK AI-3511 ■ RED AI-3512 ■ GREEN AI-3513	
	Head button	■ RED AI-3514 ■ BLACK AI-3516 ■ RED AI-3514D ■ BLACK AI-3516D	 
	Button	■ GREEN AI-3515 ■ RED AI-3517 ■ BLACK AI-3519	
	Rotating selector	■ BLACK AI-3520 ■ BLACK AI-3521	 
	Rotating lever selector	■ BLACK AI-3522 ■ BLACK AI-3523	 
	Lever operator	■ BLACK AI-3524	
	Omni-directional operator	■ BLACK AI-3525	
	Push-pull operator	■ BLACK AI-3526	

PNEUMATIC AND MECHANICAL ACTUATORS

	Pneumatic actuator	AI-3550	
	Amplified pneumatic actuator	AI-3551	
	Roller operator 1 position	AI-3560	
	Ball-push operator 1 position	AI-3562	
	Operator with omni-directional antenna 1 position	AI-3563	
	Roller lever operator 1 position	AI-3570	
	Articulated roller lever operator 1 position Complete actuation with stroke 2,5 mm, max stroke 4,7 mm	AI-3571	
	Key operator 1 position	AI-3572	


For actuator dimensions refer to section "Accessories>Actuators and buttons"

Indirect control
for panel mounting actuators Ø 22

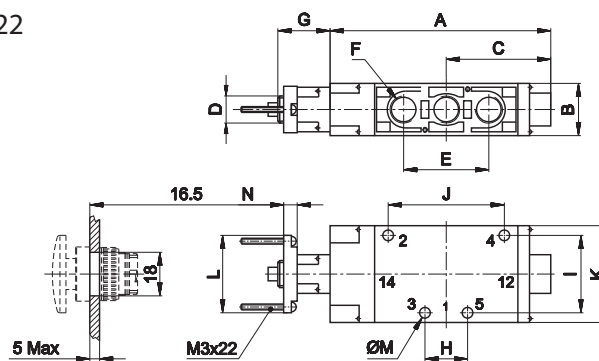

1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
14 = Control
12 = Return

	G1/8	G1/4	G1/2
A	99	114	163
B	25	27	40
C	47	54	83
D	M14x1	M14x1	M14x1
E	36	44	80
F	G1/8	G1/4	G1/2
G	27	27	27
H	18	22	40
I	26	40	50
J	36	60	108
K	40	50	63
L	40	40	40
M	4,5	5,5	6,5
N	7	7	7

Symbol	Connection	Control	Return	Pressure bar	Weight Kg	Part no.
	G1/8	ball pushrod	pneumomechanical spring	1,8÷10	0,28	AC-7013
	G1/4			2,3÷10	0,29	AC-8013
	G1/2			2÷10	0,84	AC-9013
	G1/8	ball pushrod	pneumatic amplified	1÷10	0,29	AC-7013P
	G1/4			1÷10	0,28	AC-8013P
	G1/2			1÷10	0,83	AC-9013P

MANUAL ACTUATORS


	Recessed button	■ BLACK ■ RED ■ GREEN	AI-3511 AI-3512 AI-3513 
	Head button	■ RED ■ BLACK	AI-3514 AI-3516  ■ RED ■ BLACK AI-3514D AI-3516D 
	Button	■ GREEN ■ RED ■ BLACK	AI-3515 AI-3517 AI-3519 
	Rotating selector	■ BLACK	AI-3520  ■ BLACK AI-3521 
	Rotating lever selector	■ BLACK	AI-3522  ■ BLACK AI-3523 
	Lever operator	■ BLACK	AI-3524 
	Omni-directional operator	■ BLACK	AI-3525 
	Push-pull operator	■ BLACK	AI-3526 

For actuator dimensions refer to section "Accessories>Actuators and buttons"

Single/double **pneumatic impulse**

Symbol	Connection	Control	Return	Pressure bar	Times (ms)		Weight Kg	Part no.
SINGLE PNEUMATIC IMPULSE								
	G1/8	pneumatic amplified	pneumomechanical	1,8÷10	8	10	0,22	AC-7100
	G1/4			2,3÷10	10	10	0,23	AC-8100
	G1/2			2÷10	10	10	0,76	AC-9100
DOUBLE PNEUMATIC IMPULSE								
	G1/8	pneumatic amplified	pneumatic amplified	1÷10	5	10	0,23	AC-7120
	G1/4			0,8÷10	6	6	0,21	AC-8120
	G1/2			0,8÷10	8	8	0,77	AC-9120


Single pneumatic impulse



- 1 = Supply port
 2 - 4 = Use
 3 - 5 = Exhaust
 14 = Control
 12 = Return

	A	B	C	D	E	F	G	H	I	J	K
G1/8	103	25	47	G1/8	36	G1/8	18	26	36	40	4,5
G1/4	117	27	54	G1/8	44	G1/4	22	40	60	50	5,5
G1/2	165	40	82,5	G1/8	80	G1/2	40	50	108	63	6,5

Double pneumatic impulse


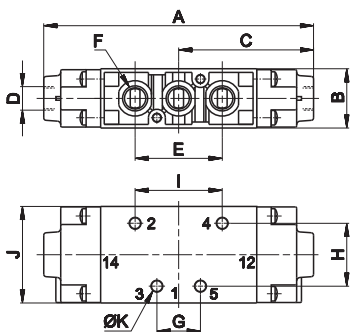


- 1 = Supply port
 2 - 4 = Use
 3 - 5 = Exhaust
 14 = Control
 12 = Return


	A	B	C	D	E	F	G	H	I	J	K
G1/8	112	25	56	G1/8	36	G1/8	18	26	36	40	4,5
G1/4	126,5	25	63	G1/8	44	G1/4	22	40	60	50	5,5
G1/2	165	40	82,5	G1/8	80	G1/2	40	50	108	63	6,5

Single/double electric impulse



Symbol	Connection	Control	Return	Pressure bar	Times (ms)		Weight Kg	Part no.
SINGLE ELECTRIC IMPULSE								
	G1/8	electric amplified	pneumomechanical	1,8÷10	18	20	0,27	AC-7500
	G1/4			2,3÷10	22	22	0,28	AC-8500
	G1/2			2÷10	23	30	1,1	AC-9500
DOUBLE ELECTRIC IMPULSE								
	G1/8	electric amplified	electric amplified	1÷10	14	14	0,33	AC-7520
	G1/4			0,8÷10	14	14	0,31	AC-8520
	G1/2			0,8÷10	16	16	1,1	AC-9520

Single electric impulse

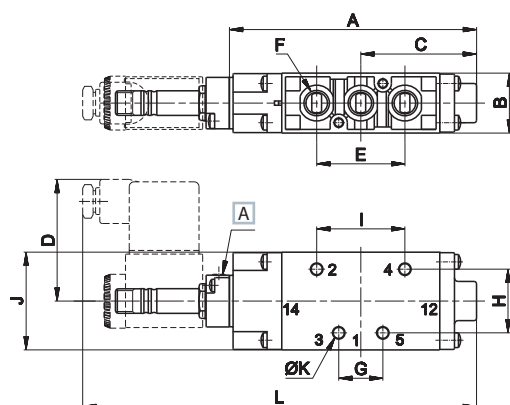


A Manual override

- 1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
14 = Control
12 = Return

	A	B	C	D	E	F	G	H	I	J	K	L
G1/8	101	25	47	50	36	G1/8	18	26	36	40	4,5	164
G1/4	116	27	54	50	44	G1/4	22	40	60	50	5,5	180
G1/2	165	40	83	48	80	G1/2	40	50	108	63	6,5	241

Double electric impulse

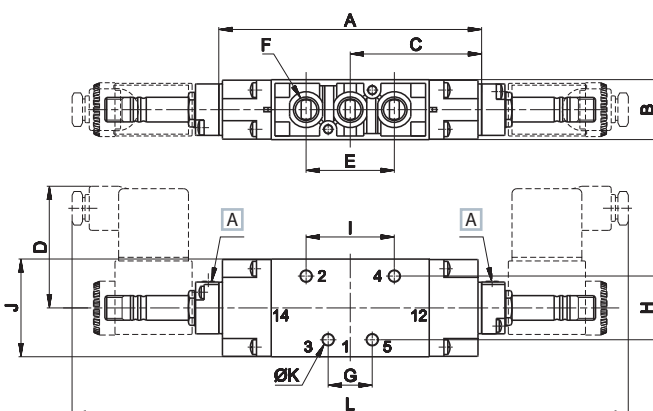

A Manual override

- 1 = Supply port
2 - 4 = Use
3 - 5 = Exhaust
14 = Control
12 = Return

	A	B	C	D	E	F	G	H	I	J	K	L
G1/8	107	25	53,5	50	36	G1/8	18	26	36	40	4,5	227
G1/4	124	27	62	50	44	G1/4	22	40	60	50	5,5	252
G1/2	164	40	80,5	48	80	G1/2	40	50	108	63	6,5	317


For technical data of coils, refer to section "Accessories>Coils"
For external servoassisted pilot, use AM - 5148 plates (refer to next pages)
Electrovalves are supplied without coil, connector and locking ring

Modular sub-base G1/8




A Manual override

- 1 = Supply port
 2 - 4 = Use
 3 - 5 = Exhaust
 14 = Control
 12 = Return

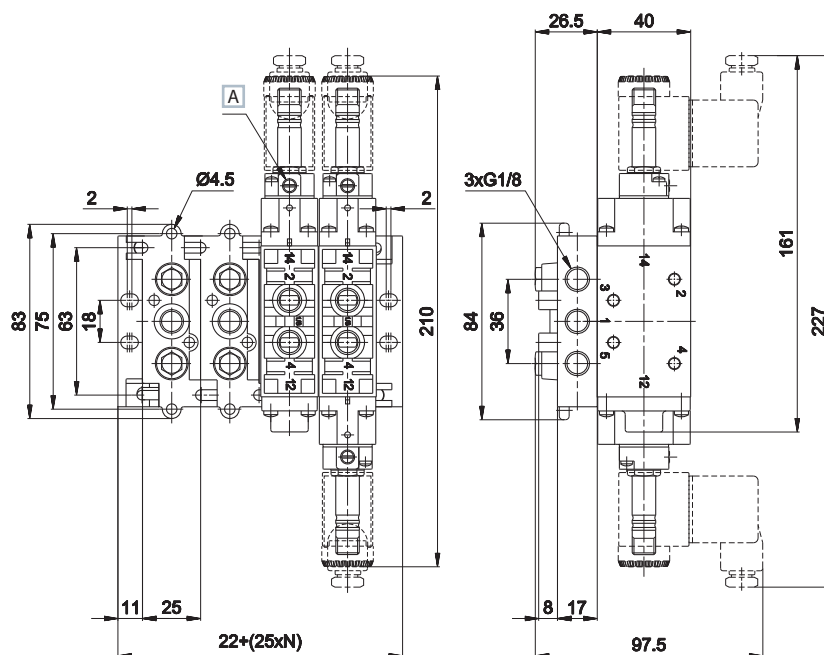


AC-7900

AC-7905



Sub-base with connections
 G1/8
 weight: 0,15 Kg




Inlet plate MIXED
 system 5/2 - G1/8
 weight: 0,06 Kg

Modular sub-base G1/4




A Manual override

- 1 = Supply port
 2 - 4 = Use
 3 - 5 = Exhaust
 14 = Control
 12 = Return


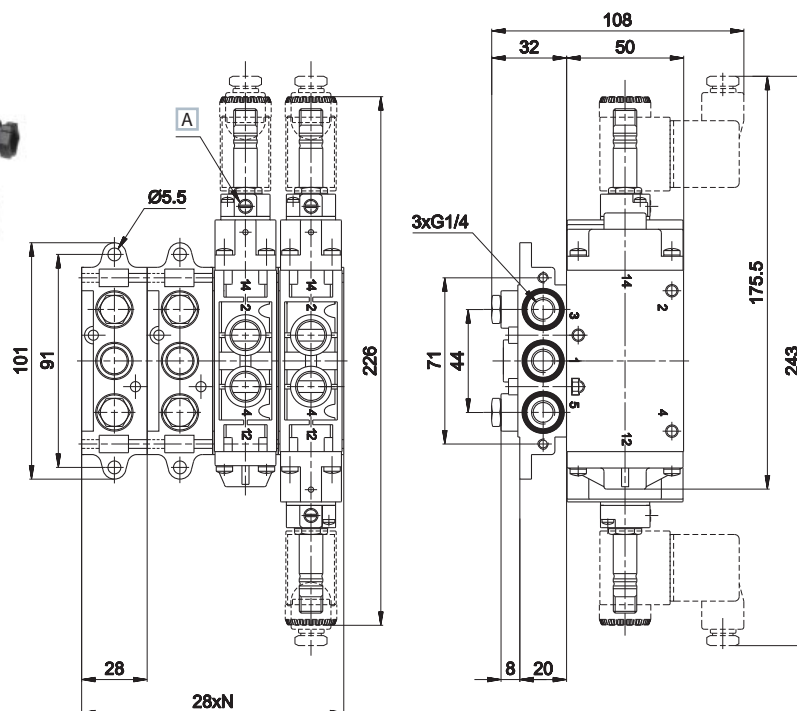


AC-8900



Sub-base with threaded
 connections G1/4
 Screws are supplied
 separately
 weight: 0,22 Kg


AM-5148

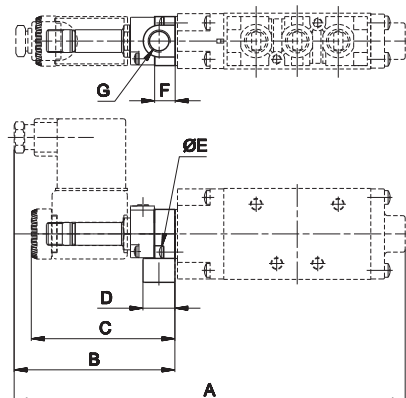



	G1/8	G1/4
A	171,5	186
B	70,5	70,5
C	63	63
D	14	14
E	2,9x10	2,9x10
F	9	9
G	G1/8	G1/8

Plate for external servoassisted pilot
weight: 0,03 Kg

AM-5151




AM-5151 + AM-5148





	G1/8	G1/4
A	87,7	88,7
A1	96,7	97,7
B	95,5	96,5
B1	104,5	105,5
C	6,5	6,5
D	25,5	25,5
E	32	32
F	2,9x10	2,9x10
G	9,7	9,7

"H" option solenoid square
weight: 0,035 Kg

AM-5152



AM-5152 + AM-5148



	G1/8	G1/4
A	106	111
A1	115	120
B	113,5	118,5
B1	122,5	127,5
C	6,5	6,5
D	36	36
E	42,5	42,5
F	2,9x10	2,9x10

"P" option solenoid square
weight: 0,05 Kg